


OPTION


L.P.I. Digital Halftone Moveable Device

LPI halftone printing with plugging can set the distance of screen printing direction of displacement. Exact correcting printing deviation caused by the deformation screen, prevent small holes due to deformation caused by ink screen plug hole.

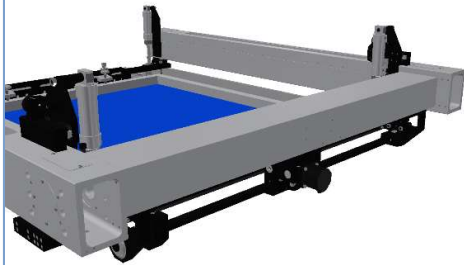


Ink Scraping Function

Suitable LPI full printing, halftone printing, can clean more ink to prevent ink penetration.

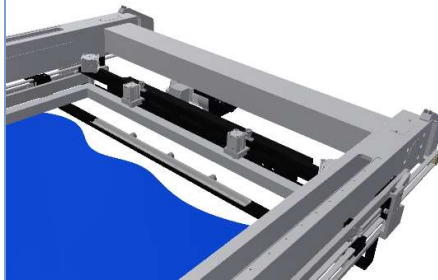

Halftone Compensation System

Special for screen manufactured error, it can mend printing deflection and improve the application number of screen halftone effectively.

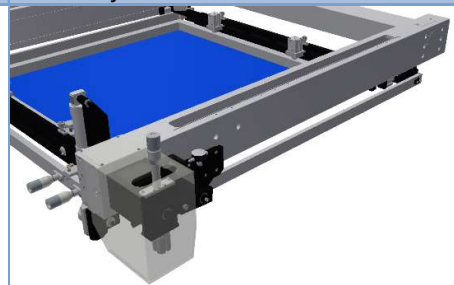


L.P.I. Printing Device

It can use with B/F off contact system to prevention sticking screen. And it also can use with a special type of squeegee bar, can increase the printing area.




Prevent Ink Dropping Device

Apply to low viscosity ink printing, it can prevent printing ink drip to screen

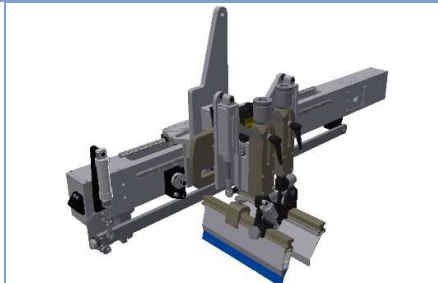

Ink Transferring Mode

Applicable to high viscosity or easy to penetrate solder mask printing.

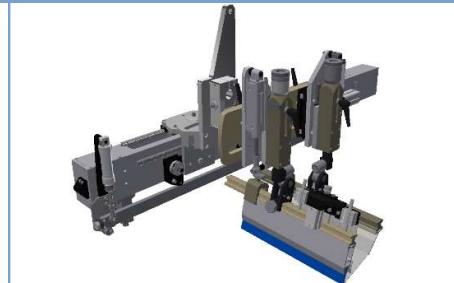


X-Y Axis Independent Moveable System

This design is available LPI screen with via hole and printing & blank screen printing, screen with pad printing can match with front and rear pad position, can avoid pad hole cumulative ink excess




Unloading Device For Hard Board

This design is suitable for each model; to avoid the mistake by operator and add productive efficiency.

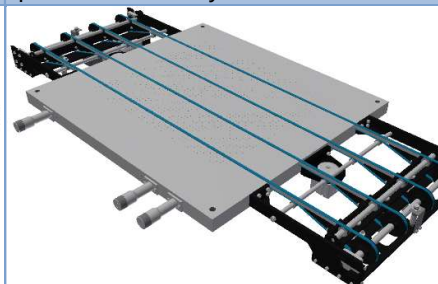

Unloading Device For Soft Board

This is special design for soft panel unloading.

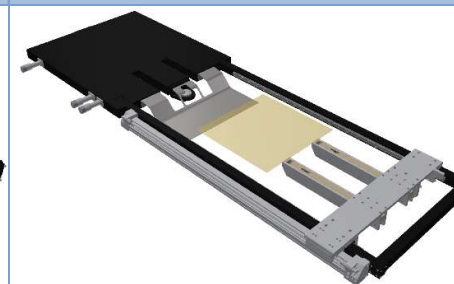

Squeegee Pressure Demonstration System

The precise adjust printing pressure guarantees the printing uniformity.




Digital Printing Pressure Setting System

It can automatically detect the stuff with the actual printing squeegee pressure squeegee mechanism automatically adjusts the depth, it only needs setting the printing pressure on touch panel operation interface.



V-Type Roller Unloading Device

This is special design for soft panel and plug hole printing unloading. it can apply prevention the ink sticky to machine.

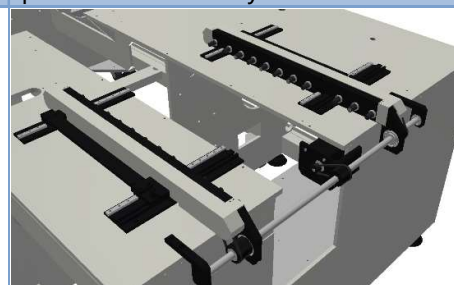

景暉精密企業有限公司

CHING HUEIPRECISIONCO.,LTD.

台灣總公司
 公司電話：886-3-3222845-6
 公司傳真：886-3-3228325
 公司地址：33859桃園市蘆竹區南崁路一段305號
 (臺灣)e-mail信箱：fa0325@ms18.hinet.net

工廠電話：886-3-3522894
 工廠地址：33859桃園市蘆竹區南崁路一段349巷19號
 統一編號：31345346

中國區客戶服務點
 (華南) 東莞市長安景暉機械貿易部
 地址：中國廣東省東莞市長安鎮咸西銘恩西街10巷1號1樓
 電話：86-0769-85393616.85393627 傳真：86-0769-85393621
 郵箱：13825751880@163.com
 (華東) 蘇州服務處
 地址：中國江蘇省蘇州市新區濱河花園30幢302室
 電話：86-0512-68785262 傳真：86-0512-68249272
 郵箱：zhuyilongsu@163.com
 (業務客訴)e-mail信箱：chinghuei@changnan.net
 公司網頁：www.chinghueiweb.com